

Preliminary



**Compact 4K PTZ Camera for 4K 30p/25p high quality video output. Equipped with an ultra-wide-angle lens with a 111° field of view and capable of video output with three interfaces, HDMI, LAN and USB.**



The AW-UE4WG/KG PTZ Camera supports 4K 30p/25p video output.

Equipped with an ultra-wide-angle lens with a 111° field of view to capture every part of even the largest spaces and transmit wide-angle video in limited installation space.

The unit supports PoE\* supply as well as used as a USB camera that can be powered from a computer, realizing a single cable solution for video transmission, camera control and power supply.

Furthermore, the unit boasts high-performance operability through RTMP (Real-Time Messaging Protocol) compatibility for direct upload of video to live-streaming services, and is also excellent for live production. The camera handles both large and small spaces thanks to 4K high image quality and wide-angle video output that's perfect for recording everything from lectures and meetings to e-Sports production.

\* PoE is the abbreviation for Power over Ethernet.

# 4K Integrated Camera AW-UE4WG/KG

## High-Quality 4K 30p/25p Video Output

Enables 3840 x 2160 4K output and a variety of other formats.


### Output format (Preliminary)

4K	2160/30p, 2160/29.97p, 2160/25p
HD	1080/60p, 1080/59.94p, 1080/50p, 1080/30p, 1080/29.97p, 1080/25p
	720/60p, 720/59.94p, 720/50p

## Ultra-Wide-Angle Lens with a 111° Field of View

Enables the entire space to be captured regardless of the installation position.

### The 111° Field of View

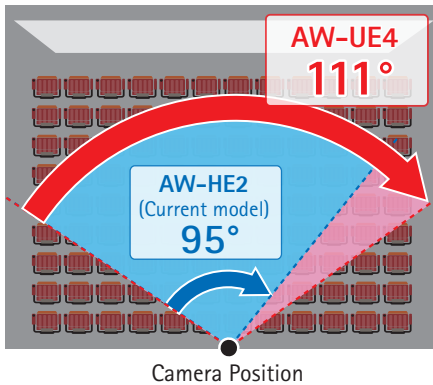

### <Rear View>




## Single Cable Solution


In addition to PoE\* supply, power supply from a computer via USB cable is also supported to enable operation without connecting an AC adapter.

\*PoE is the abbreviation for Power over Ethernet.

### Using PoE Supply

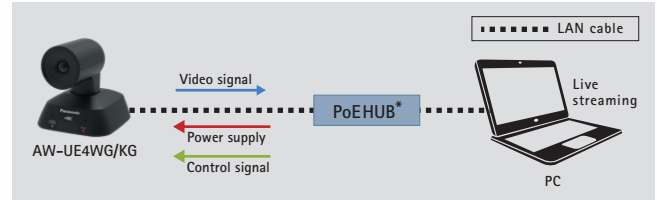

### Using as a USB Camera

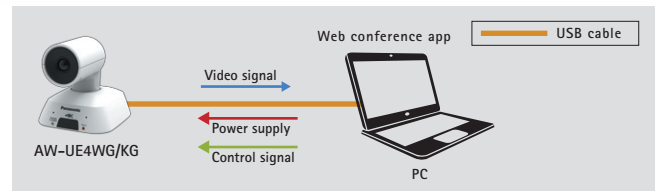

\*AC adapter or PoE supply is required for HDMI output.

## <Specifications>

(Preliminary)

Power Requirements	DC 5 V (USB) DC 42 V - 57 V (PoE)
Dimensions (W x H x D)	123 mm x 131 mm x 136 mm (4-53/64 inches x 5-5/32 inches x 5-11/32 inches)
Imaging Sensors	1/2.5-type MOS
Lens	Digital zoom: 4x
Horizontal angle of view	111°
Video output	HDMI, IP, USB
Internal mic	Yes (with mute function)
Pan/Tilt	Manual adjustment.
Panning Range	220° (±110°)
Tilting range	50° (±25°)

\*Specifications are subject to change without prior notice for product improvement, etc.

\* The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

# Panasonic®

Panasonic Corporation  
Connected Solutions Company

2-15 Matsuba-cho, Kadoma, Osaka 571-8503 Japan



For more information, please visit Panasonic web site  
<https://pro-av.panasonic.net/en/qr/>



Factories of AVC Networks Company have received ISO14001:2004-the Environmental Management System certification. (Except for 3rd party's peripherals.)



Broadcast and  
Professional  
AV Website



Contact Information



Facebook



Mobile App