

POWER CENTER PD-2A



PD-2 400 watts 1RU 19" rack Power Distribution Center is designed to provide a steady power supply for studio equipment, such as the video switcher, monitors, recorders and intercom system.


It features auto-switchable inputs of AC 110V/220, a UPS interface and DC 12V ports.

PD-2 has 4 12V/3A terminals, two 12V/5A terminals, two 12V/10A terminals (shared) and XLR DC outputs. It provides up to 400 Watt.



The PD-2 adds reliability to studio equipment and consolidates power supplies and cabling.

FEATURES

- Maximum rating 400Watts
- XLR DC output includes: 12V/3A x 4 , 12V/5A x2, 12V/10A (shared) terminals x 2
- Power Indicator and auto-recovering fuse protector for each output terminal
- Sequential-Power On of each DC output terminal during power on stage by 1 second duration
- Auto-switchable AC 110/220V or DC12V UPS input source
- Compliant Safety / EMI and RoHS certification

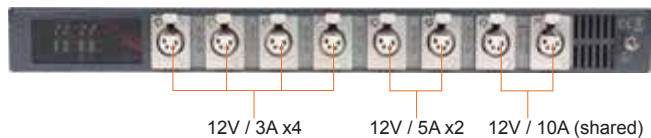

REDUNDANT POWER CENTER PD-4A

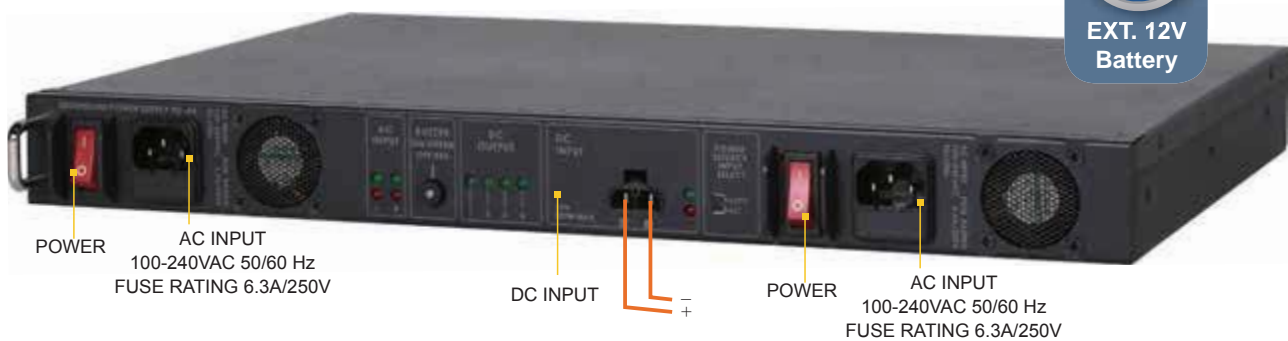

FEATURES

Datavideo PD-4 Power Distribution Center comes with two AC power supplies to provide instant fail-over redundancy. PD-4 provides multiple DC 12V outputs. The automatic port control sequencer intelligently initiates each output to ensure the power supply on start-up.

The PD-4 can also be powered from a regulated DC 12V power source. It can run from a car or van's power outlet with the use of a suitable regulator.

- Input

AC input outlet: Two 100-240V, 50Hz or 60Hz AC input with power switch

DC input: 12V, 300Watts

- Output (1 second sequential control on each DC output)

12V±5%, 5A XLR DC Female Jack x 3

12V±5%, 10A XLR DC Female Jack x 2

-Dimension

19" 1RU rack size

REAR VIEW

